# **PCT**


# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : B41J 13/10, G03G 15/00	A1	(11) International Publication Number: WO 99/47362  (43) International Publication Date: 23 September 1999 (23.09.99)
(21) International Application Number: PCT/U (22) International Filing Date: 12 March 1999	(12.03.9	(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT,
(30) Priority Data: 60/078,389 18 March 1998 (18.03.98)	i	Published US With international search report.
(71) Applicant: INTERNATIONAL PAPER COMPANY Two Manhattanville Road, Purchase, NY 10577	-	S3;
(72) Inventor: STIER, David, E.; 6388 Derbyshire Lane, OH 45140 (US).	Lovelar	nd,
(74) Agent: SKINKISS, Ralph, J.; International Paper Tri-Ridge Boulevard, Loveland, OH 45140 (US)		83

(54) Title: PAPER CARTRIDGE

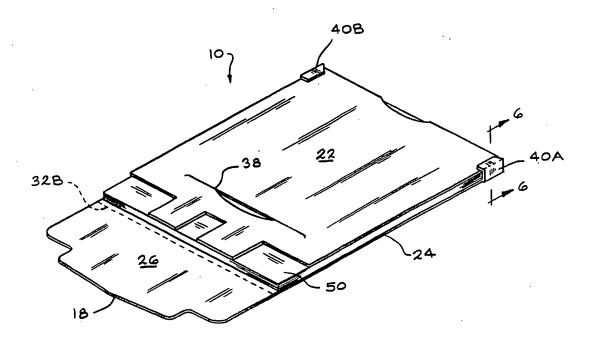

#### (57) Abstract

The present invention discloses and teaches a paper containing cartridge suitable for insertion into a plain paper printing or copying device whereby specialty printing papers may be conveniently inserted and removed from the printing device and stored without the paper therein being subjected to damage.

BNSDOCID: <WO\_\_\_\_\_9947362A1\_I\_>

## FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
ΑU	Australia	GA	Gabon	ĹV	Latvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	ТJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	ΙE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania -	UG	' sranda
BY	Belarus	IS	Iceland	MW	Malawi	US	ed States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	kistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	.e: Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
СН	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		•
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		•
EE	Estonia	LR	Liberia	SG	Singapore		

WO 99/47362 PCT/US99/05525

#### PAPER CARTRIDGE

#### OTHER RELATED APPLICATIONS

This application claims the priority of United States Provisional Application serial no. 60/078,389 filed on March 18, 1998.

## **BACKGROUND OF THE INVENTION**

Heretofore printing paper typically used in personal computer printers and plain paper facsimile and copy machines has been supplied in reams, generally consisting of five hundred sheets, over wrapped with a simple protective covering. However smaller quantities of specialty papers, of a higher quality, are in demand by the small office-home office (SOHO) industry for specialized uses.

With increased use of specialty papers, such as high quality bond, colored, water marked, personal letter heads, special invitations, etc., for special purposes the typical SOHO users find themselves frequently changing the paper in their respective printing devices. Because of such frequent changing of the paper the paper supplies frequently become damaged during the loading and unloading process, or during nonuse storage.

## **SUMMARY OF THE INVENTION**

The present invention discloses and teaches a paper storage and supply cartridge that will protect small quantities of printing papers typically used in printing devises, such as personal computer printers, plain paper facsimile machines, document copiers, and the like, while the paper is outside of the printing device and whereby the cartridge, having the paper supply therein, may be placed directly within the paper supply tray of the printing device when use of the paper within the cartridge is desired.

The paper cartridge taught herein generally comprises a unitary paperboard blank that enwraps the paper supply stack. The cartridge is open on both sides and at the feed end. The width of the cartridge paperboard thus being identical to that of the paper within the cartridge so that the cartridge will fit within the typical paper supply tray of the associated printing device. The cartridge configuration at the feed end will vary from printing device to printing device and will therefore be configured to cooperate with an associated printing device feed mechanism. Preferably small tabs are provided at the non-feed end of the cartridge extending from the bottom panel to the top panel to provide structural intedrigtdy to the cartridge; the tabs are positioned and sized so as not to interfere with the paper tray of the associated printing device.

Two embodiments are disclosed. The first embodiment teaches a cartridge having an integral feed end protective cover which may be folded back when the cartridge is placed within the paper tray of the printing device. A second embodiment teaches cartridge having no integral protective cover, however the second embodiment preferably includes a protective sheath within which the cartridge may be stored when not in use.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 presents a pictorial view of a paper cartridge, embodying the present invention, and illustrated in its paper protecting, storage configuration.

Figure 2 presents a plan view of a unitary paperboard blank from which the paper cartridge illustrated in figure 1 de.

Figure 3 presents a pictorial view of the first step in forming the paperboard blank, illustrated in figure 2, into the paper cartridge.

9947362A1 I

1	Figure 4 presents a pictorial view of the paper cartridge after the first
2	forming step is performed.
3	
4	Figure 5 presents a pictorial view of the second step in forming the final
5	paper cartridge
6	
7.	Figure 6 is a crossectional view taken along line 6-6 in figure 1.
8	
9	Figure 7 presents a pictorial view of the underside of the paper package,
10	as illustrated in figure 4, showing the package's covering flap being folded
11	backward into its retaining slot.
12	$\cdot$
13	Figure 8 presents a pictorial view of the underside of the paper package
14	as illustrated in figure 4 having its covering flap inserted into its receiving slot
15	thereby exposing the paper supply therein for extraction by the associated
16	printing apparatus.
17	
18	Figure 9 presents a pictorial of an alternate embodiment of the paper
19	cartridge.
20	
21	Figure 10 presents a plan view of a unitary paperboard blank from which
22	the paper cartridge of figure 9 may be manufactured.
23	
24	Figure 11 presents a pictorial of the paperboard blank as illustrated in
25	figure 10 being formed about a stack of paper thereby forming the paper
26	cartridge as illustrated in figure 9.
27	

Figure 12 presents a pictorial view of an optional covering shroud within which the paper package as illustrated in figure 9 may be placed for the greatest protection when not in use as illustrated in figure 13.

Figure 13 presents a pictorial illustration of the paper package of figure 9 being placed within the shroud illustrated in figure 12.

Figure 14 presents a plan view of the unitary paperboard blank from which the paper cartridge of figure 9 may be manufactured.

Figure 15 presents a pictorial view of the blank of figure 14 being formed into the paper reasonage of figure 9.

#### DETAILED DESCRIPTION OF THE PRESENT INVENTION

Referring now to figures 1 through 5. Figure 2 presents a plan view of a unitary paperboard blank 20 from which the paper protecting cartridge 10 is made. Blank 20 generally comprises a bottom panel 22, a top panel 24, and a locking flap 26. Bottom panel 22 is separated from top panel 24 by a pair of parallel, scored fold lines 28A and 28B. Similarly a pair of parallel, scored fold lines 32A and 32B separate top cover 24 and locking flap 26. Slots 36 and 38 are provided in bottom panel 22 and top panel 24, respectively, to receive therein locking flap 26 as will be described further below. Adhesive tabs 40A and 40B extend from the lower edge of top panel 24 as illustrated in figure 2. Adhesive tabs 40A and 40B each include a pair of parallel, scored fold lines 42A, 42B, 42C and 42D as illustrated in figure 2. Score lines 42B and 42C are coincident with the longitudinal edge 46A and 46B of top panel 24.

Depending upon the particular plain paper printing device for which the paper cartridge is intended, the bottom panel end configuration 48 may vary from device to device. The particular end configuration 48 identified by broken lines in figure 2 is believed suitable for most ink jet printing devices.

Figure 3 illustrates the first step in forming blank 20 into the paper cartridge 10, of figure 1, wherein the top panel 24 is folded over top of bottom panel 22, about fold lines 28A and 28B, so as to form a square box like end, see figure 7. It is to be noted that in figure 3, as in the following figures, a stack of paper 50 is shown placed between the bottom and top panels.

Figure 4 illustrates the paper stack sandwiched between the top panel 22 and bottom panel 24. Adhesive tabs 40A and 40B are folded about fold lines 42A, 42B, 42C, and 42D, as illustrated in figure 6, and adhesively adhered to top panel 24 thereby completing the cartridge 10. It is to be noted that no adhesive material is to be applied to the [portion of tabs 40A and 40B where those tabs are in contact with the paper stack 50; otherwise the free movement of paper from the stack may be affected.

As an alternative, integral tabs 40A and 40B may be replaced by a separate, thin, tape like, or strap like, material of minimum thickness to keep the overall width dimension of the cartridge to a minimum so that it easily fits in the printing device paper loading tray. Further such tape like strap may be placed at any preselected location along the longitudinal edge 46A or 46B of the cartridge.

Referring now to figure 5. The top locking flap 26 is folded about fold lines 32A and 32B with tongue 18 being tucked into slot 38 thereby forming the cartridge into its paper protecting and storage mode as illustrated in figure 1.

When the cartridge is to placed in its intended printing device, the cartridge, as illustrated in figure 1, is flipped over as shown in figure 7, and locking flap 26 is folded, about fold line 34, with tongue 18 being placed inside slot 36 thereby presenting a cartridge configuration, as illustrated in figure 8, suitable for insertion into the paper supply tray of its associated printing device.

Now referring to figures 9 through 11. Figure 10 presents a plan view of a paperboard blank 100 suitable for forming an alternate embodiment of my paper cartridge as illustrated in figure 9. Blank 100 generally comprises a bottom panel 110, a top panel 112 separated by two parallel, scored fold lines 114A and 114B. Adhesive tabs 118A and 18B extend laterally outward from the side edges 116A and 116B of top panel 112 as illustrated in figure 10. Adhesive tabs 118A and 118B include parallel, scored fold lines 120A, 120B and 122A and 122B as illustrated in figure 10. Similar to the first embodiment, as illustrated in figures 1 through 9, the second embodiment also includes an end configuration 124, shown in broken lines in figure 10, that is contomized to fit the associated paper printing device paper through mechanism. Depending upon the particular printing device and its paper feed mechanism, the end configuration may be changed as necessary.

Figure 11 illustrates folding blank 100 about fold lines 114A and 114B to form the second embodiment paper cartridge as illustrated in figure 9. The second embodiment as illustrated in figure 9 is similar to that of the first embodiment as illustrated in figure 1 except that the second embodiment of figure 9 does not have the protective end flap 26. The figure 1 embodiment.

However, in place of the foldable end flap 26 of embodiment one, a protective shroud 126 is provided for the cartridge of figure 9 as illustrated in figure 13. The structure and assembly of shroud 126 is illustrated in figures 12 through 15.

Figure 14 presents a plan view of a paperboard blank 130 from which shroud 126 is made. Blank 130 generally comprises a bottom panel 132 and a top panel 134 separated by a pair of parallel, scored fold lines 136A and 136B. Extending laterally outward from top panel 134 are adhesive flaps 136A and 136B. Adhesive flaps 136A and 136B include a pair of parallel, scored fold lines 138A, 138B, 142A and 142B as illustrated in figure 14.

Figure 15 illustrates the first step in forming shroud 126 from blank 130 whereby bottom panel 132 is folded about fold lines 136A and 136B after which adhesive flaps 136A and 136B are folded about fold lines 138A, 138B, 140A and 140B and adhesively adhered to bottom panel 132 as illustrated in figure 12. To protect cartridge 100 and its paper stock 50 therein cartridge 100 is slipped into shroud 120 as illustrated in fig 13.

Having described the preferred embodiments of the present invention, and its benefits and advantages, it will be understood by those of ordinary skill in the art that the foregoing description is merely for the purpose of illustration and that numerous substitutions, rearrangements, and modifications may be made in the invention without departing from the scope and spirit of the appended claims.


## I claim:


- 1. A cartridge containing printing paper therein suitable for placing in the paper supply means of a printing device, said cartridge comprising: a univary paperboard blank folded 180 degrees over itself thereby forming generally parallel bottom and top panels having a squared-off, closed, first end extending between said bottom and top panel and an open, opposite, second end, a stack of printing paper positioned between said bottom and top panel, said top and bottom panels having a width no greater than that of said paper stack.
- 2. The cartridge as claimed in claim 1 including at least one tab, adjacent said closed end and extending between and affixed to said bottom and top panel whereby said paper stack is restrained from lateral movement between said bottom and top panels.
- 3. The cartridge as claimed in claim 2 wherein said tab is not a unitary part of said paperboard blank.
- 4. The cartridge as claimed in claim 3 wherein said tabs are of a thickness less than that of said paperboard blank.
- 5. The cartridge as claimed in claim 4 wherein said s are positioned at preselected locations along the longitudinal edges of said cartridge.
- 6. The cartridge as claimed in claim 2 including two of said tabs positioned opposite one another, one on each side of said cartridge.

WO 99/47362 PCT/US99/05525


- 7. The cartridge as claimed in claim 1 wherein said bottom panel and said top panel are of unequal lengths.
- 8. The cartridge as claimed in claim 1 wherein at least one of said bottom or top panels includes, at said open end, an end configuration unique to and compatible with an associated printing device paper feed mechanism.
- 9. The cartridge as claimed in claim 1 wherein said top panel includes an extended portion extending beyond said open end and includes means whereby said extended portion may be folded about said open end of said cartridge thereby protecting said paper stack when said cartridge is removed from said printing device and stored for subsequent use.
- 10. The cartridge as claimed in claim 9 wherein said top panel further includes means whereby said extended portion may be folded back over said top panel thereby exposing said paper stack to the associated printing device's paper feed mechanism.
- 11. The cartridge as claimed in claim 9 wherein said means whereby said extended portion of said top panel may be folded back over said top panel includes a tongue end on said extended portion and a slot within said bottom panel for receipt of said top panel tongue therein.
- 12. The cartridge as claimed in claim 10 wherein said means for folding said top panel back over itself includes a tongued end on said extended portion and a slot within said top panel for receipt of said tongue therein.

13. A cartridge assembly containing printing paper therein suitable for placing in the paper supply means of a printing device to supply printing paper to said device, said assembly comprising: a unitary paperboard blandolded 180 degrees over itself thereby forming generally parallel bottom and top panels having a squared-off, closed, first end extending between said bottom and top panel and an open, opposite, second end, a stack of printing paper positioned between said bottom and top panel, said top and bottom panels having a width no greater than that of said paper stack, a paperboard sheath within which said cartridge assembly may be placed when said cartridge is removed from said printing device.

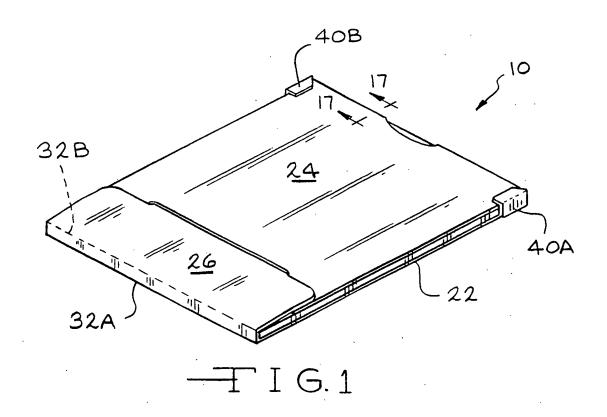


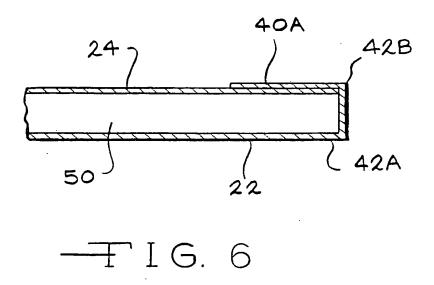



**SUBSTITUTE SHEET (RULE 26)** 

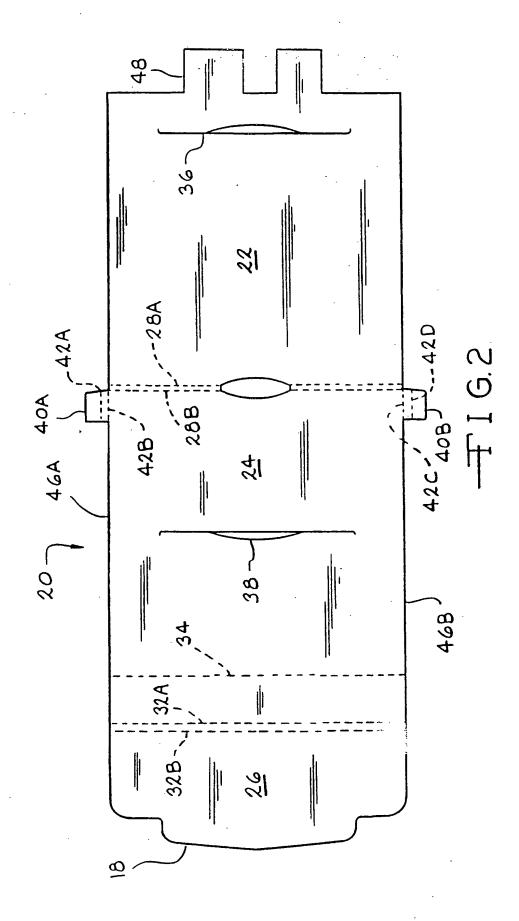



SUBSTITUTE SHEET (RULE 26)

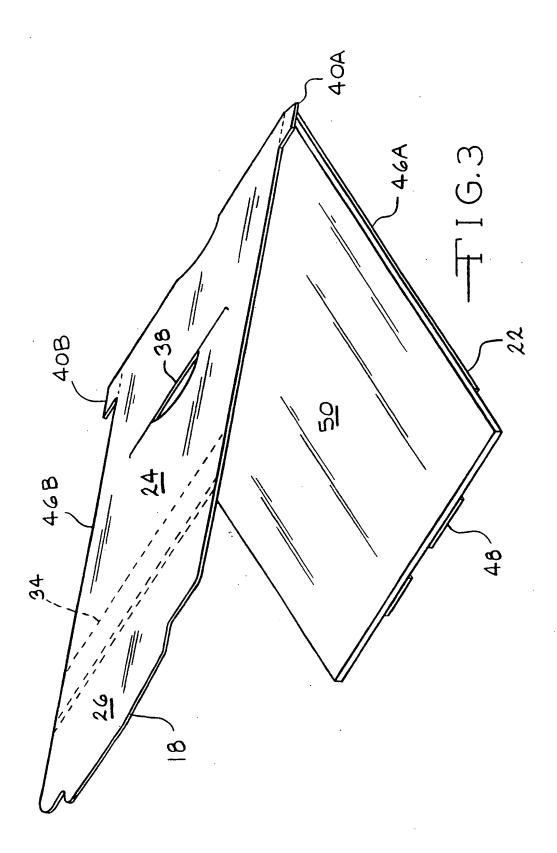


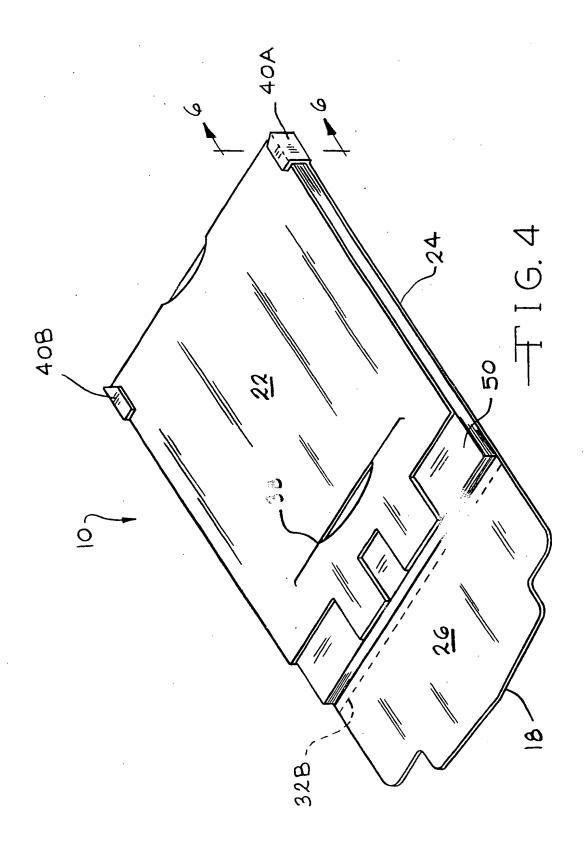


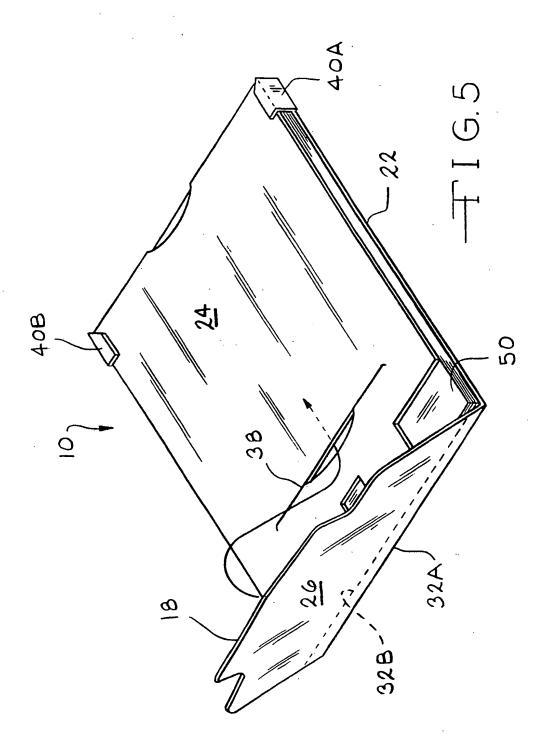

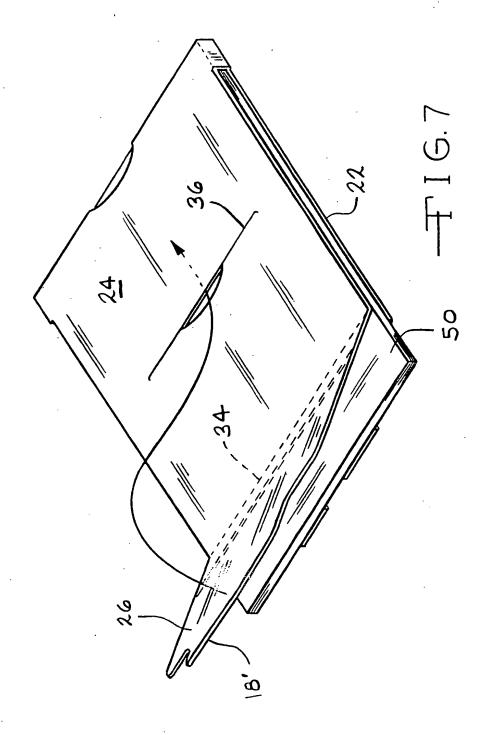


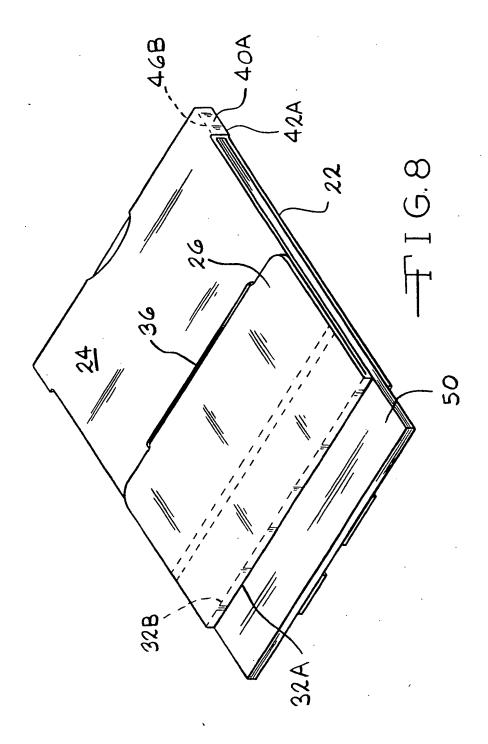


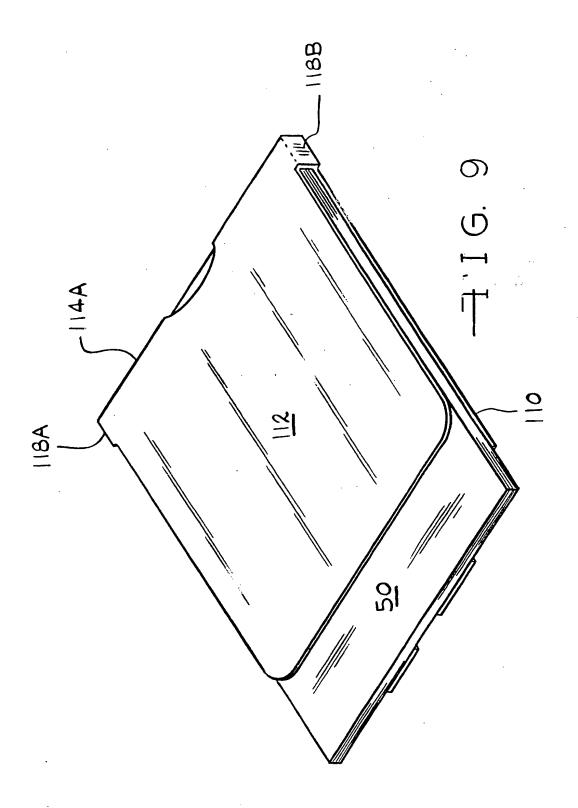


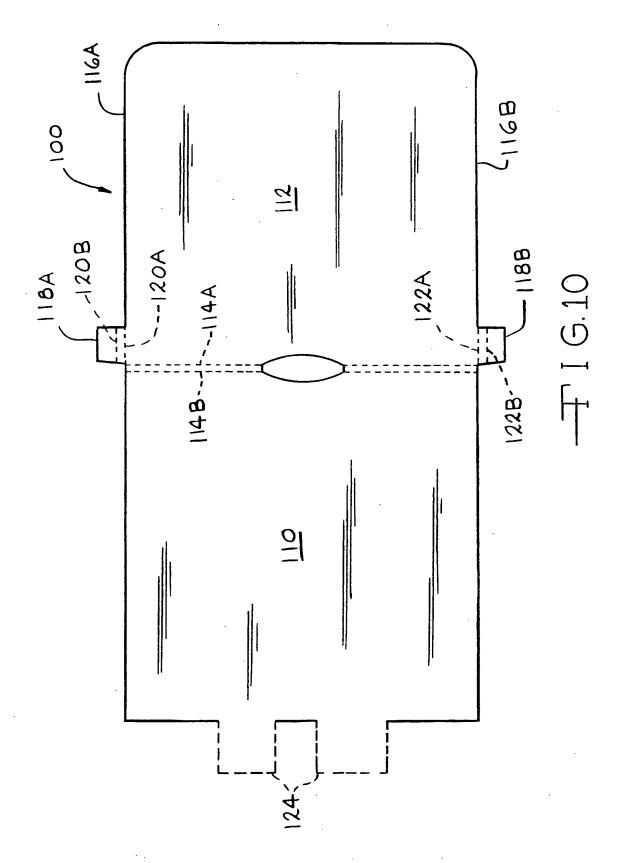


SUBSTITUTE SHEET (RULE 26)

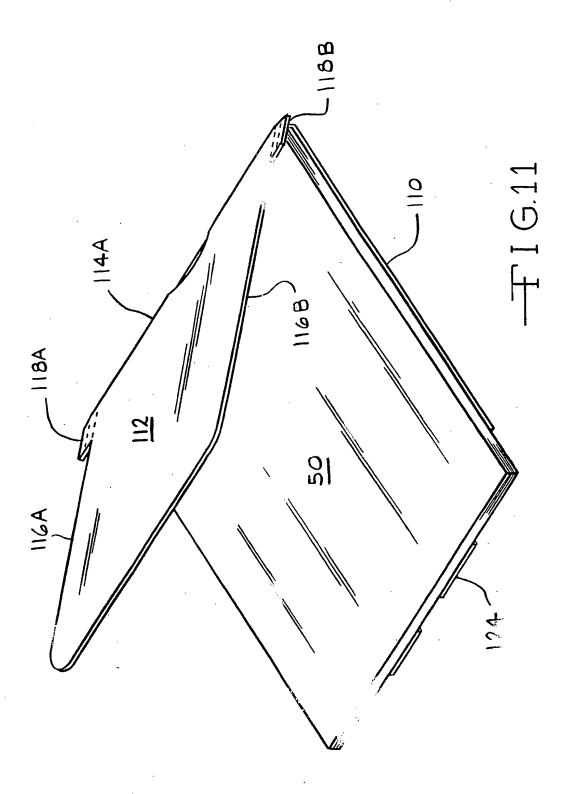


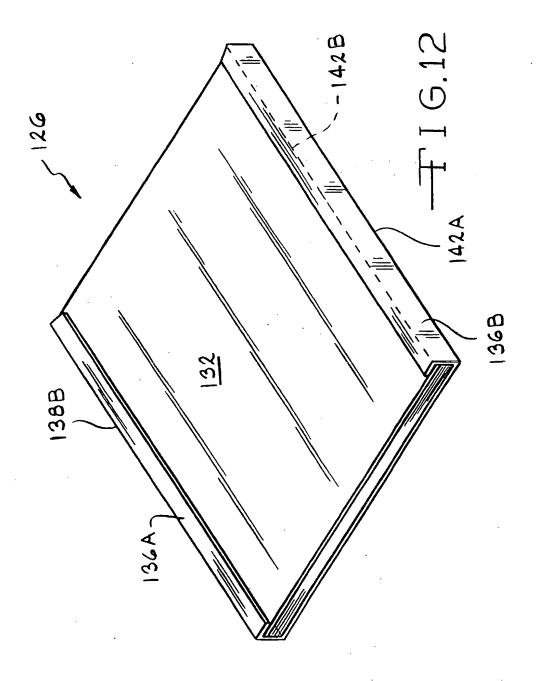

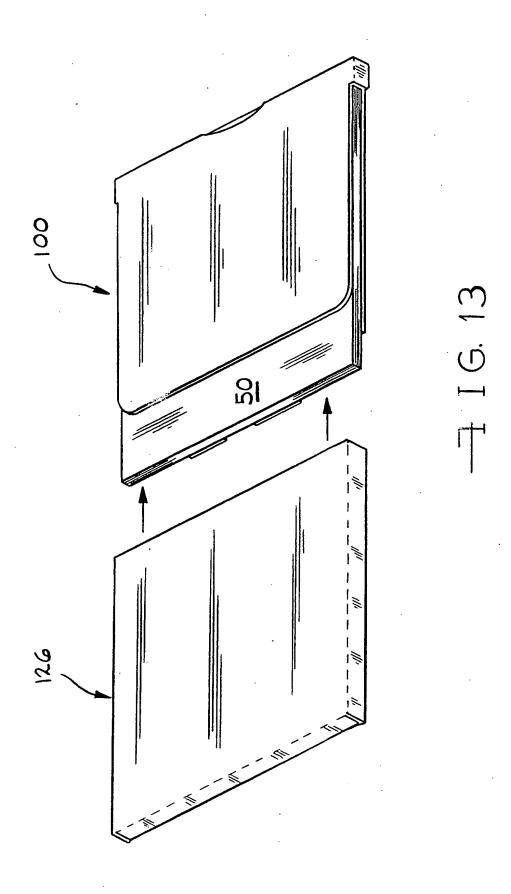

SUBSTITUTE SHEET (RULE 26)

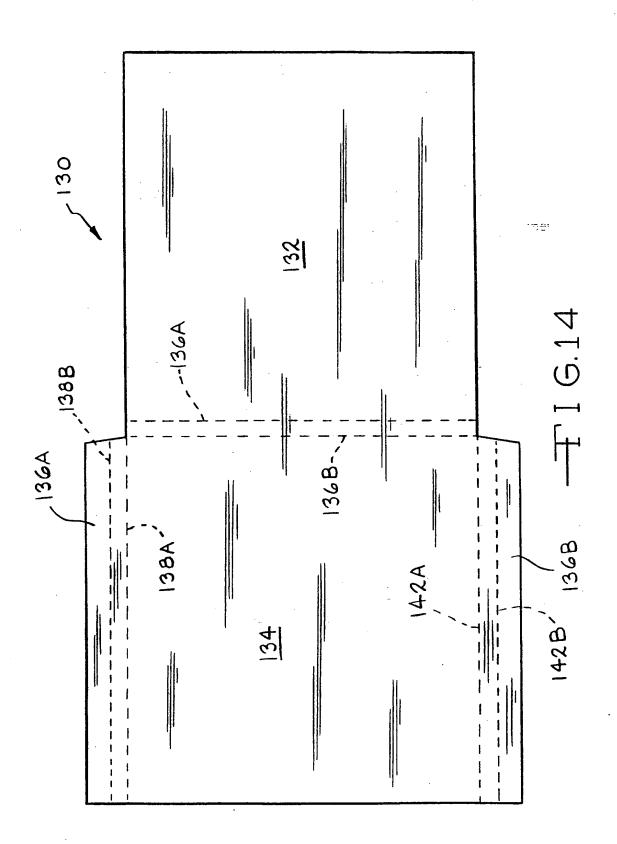

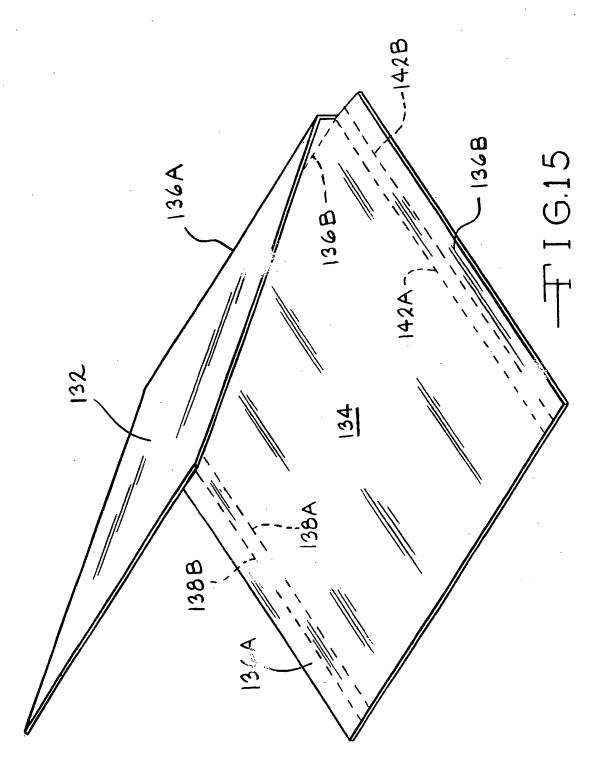

# INTERNATIONAL SEARCH REPORT

Internal Application No

		101/03 33/.03323
A. CLASS IPC 6	IFICATION OF SUBJECT MATTER B41J13/10 G03G15/00	
According to	o International Patent Classification (IPC) or to both national classific	ation and IPC
	SEARCHED	
Minimum do IPC 6	ocumentation searched (classification system followed by classification B41J G03G B65D B65H	on symbols)
	tion searched other than minimum documentation to the extent that s	
Electronic d	lata base consulted during the international search (name of data ba	se and, where practical, search terms used)
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT	
Category °	Citation of document, with indication, where appropriate, of the rel	evant passages Relevant to claim No.
Α	US 3 727 823 A (SULLIVAN W) 17 Apsee the whole document	oril 1973 1,13
Α	FR 2 610 898 A (GARNIER PONSONNET SA) 19 August 1988 see the whole document	T VUILLARD 1,13
Α	US 3 767 188 A (ROSENBERG C ET AL 23 October 1973 see abstract; figures 1-4,8	1,13
A	PATENT ABSTRACTS OF JAPAN vol. 006, no. 220 (M-169), 5 Nove & JP 57 125072 A (SHINSHIYUU SEI 4 August 1982 see abstract	1,13 ember 1982 (KI KK),
	-	-/
النسا	ner documents are listed in the continuation of box C.	X Patent family members are listed in annex.
•	legories of cited documents:	"T" later document published after the international filing date
conside	nt defining the general state of the art which is not ered to be of particular relevance	or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
filing da	ocument but published on or after the international ate  nt which may throw doubts on priority claim(s) or	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
which is citation	s cited to establish the publication date of another or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the
other m "P" docume	nt published prior to the international filing date but	document is combined with one or more other such docu- ments, such combination being obvious to a person skilled in the art.
later th	an the priority date claimed	"&" document member of the same patent family
	June 1999	Date of mailing of the international search report  14/06/1999
Name and m	ailing address of the ISA	Authorized officer
	European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk	
	Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Nielsen, M

# INTERNATIONAL SEARCH REPORT

Inte anal Application No
PCT/US 99/05525

\(C==t!=	MILES DOCUMENTS CONCIDENCE TO DE TELEMENT	PCT/US 99/05525
Category *	citation DOCUMENTS CONSIDERED TO BE RELEVANT  Citation of document, with indication, where appropriate, of the relevant passages	Relevant in claim No.
1	US 3 360 258 A (NIX GEORGE F) 26 December 1967 see abstract see column 4, line 37-44; figures 1,2	1,13
Α	US 4 185 745 A (KAUFMANN HEINRICH ET AL) 29 January 1980 see abstract	1,13

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

1

# INTERNATIONAL SEARCH REPORT

...formation on patent family members

Inte onal Application No
PCT/US 99/05525

Patent document cited in search report	rt	Publication date	Patent family member(s)	Publication date
US 3727823	Α	17-04-1973	NONE	<del></del>
FR 2610898	Α	19-08-1988	NONE	
US 3767188	Α	23-10-1973	NONE	
US 3360258	Α	26-12-1967	NONE	
US 4185745	A	29-01-1980	DE 2614530 A CA 1064873 A CH 615400 A FR 2346241 A GB 1557397 A SE 7703494 A	13-10-1977 23-10-1979 31-01-1980 28-10-1977 12-12-1979 04-10-1977